

External Systems

Add another dimension to an architectural façade with the incorporation of Screenwood external timber panels.

Panel Sizes

- Screenwood External Panels are delivered to site pre-finished in modules 296mm wide and in lengths from 100mm–3600mm.
- Panels can be cut to specified lengths and corner and edge trims delivered ready for installation as required.
- For panel lengths longer than 3600mm, Screenwood recommends dividing in two or more bays of panels with an expressed gap of 10mm. Screenwood recommends avoiding butt joints.

Timbers, Coatings and Finishes

Screenwood solutions are available in Western Red Cedar and Spotted Gum (exclusions apply). Screenwood is PEFC certified. All panels are pre-finished prior to delivery. Our oil coating has an oxidizing finish and it slowly wears away. When re-finishing is required, simply wash down with a mild solution of detergent and water to remove dust and dirt and recoat to desired finish. To allow the screes to naturally weather off to grey, a clear timber preservative is recommended.

Building Services

Flush mounting or recessing of fixtures and incorporation of building services can be accommodated by trimming panels on site.

PEFC and Environmental Certification

Environmental considerations are a cornerstone of design and production at Screenwood. Screenwood is PEFC certified and is committed to using timber from sustainably managed forests.

Substrate Requirements and Installation

Screenwood External Panels are designed as a modular system:

- For ease of installation and reduction in labour costs over installing the blades individually.
- Ideal for existing façades to refresh a building or conceal building services.
- Can be easily removed for access to services after construction.
- The standard colour of the Screenwood bracket is black. Using colour matched black screws to install the panels further conceals the installation fixtures.
- SC15 acoustic scrim is not included for external applications.

Maintenance and Warranty

Timber is a natural material and the lifespan of our external coatings will vary depending on the application, location and installation. Aspect of the façade can greatly influence the life as well as client expectations regarding the colour vibrancy of the coating. To allow timber to weather naturally to grey/silver colour a clear timber preservative treatment is suggested.

Oil Coatings

Typically, oil finishes need to be reapplied every 12–24 months.

All Screenwood products carry a limited 5 year warranty. Refer to www.screenwood.com.au for further maintenance and warranty information and exclusions.




Should you require any further information, please contact us on:

Tel (02) 9521 7200 | Fax (02) 9521 7222

Email info@screenwood.com.au

Web www.screenwood.com.au

Recessed Rendered Wall Installation

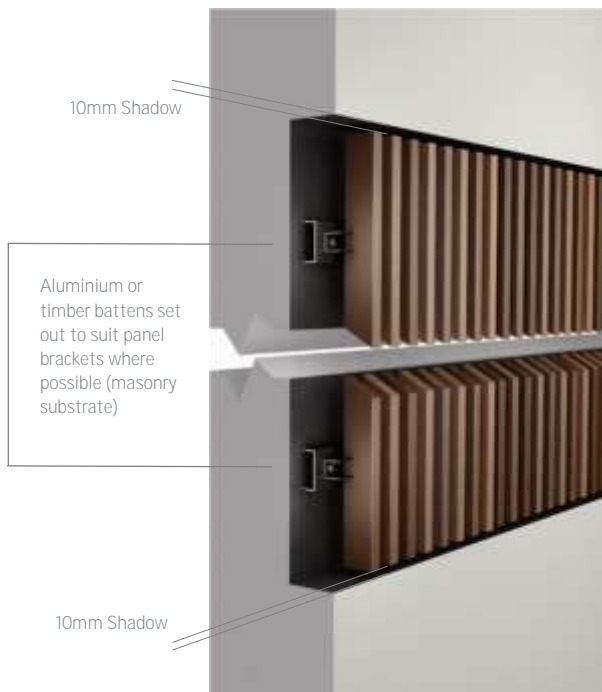

Standard Panel Profiles

3020



BLADE	Width 17mm	Depth 28mm	Spacing 20mm
MODULE	Width 296mm	Depth 29mm	Length up to 3.6m

3040 *



BLADE	Width 40mm	Depth 28mm	Spacing 19.2mm
MODULE	Width 296mm	Depth 29mm	Length up to 3.6m

4012 *



BLADE	Width 12mm	Depth 38mm	Spacing 12.6mm
MODULE	Width 296mm	Depth 39mm	Length up to 3.6m

4020 *



BLADE	Width 17mm	Depth 38mm	Spacing 20mm
MODULE	Width 296mm	Depth 39mm	Length up to 3.6m

6020 *



BLADE	Width 17mm	Depth 63mm	Spacing 20mm
MODULE	Width 296mm	Depth 64mm	Length up to 3.6m

6030



BLADE	Width 28mm	Depth 60mm	Spacing 30.2mm
MODULE	Width 296mm	Depth 61mm	Length up to 3.6m

9040



BLADE	Width 38mm	Depth 90mm	Spacing 60.7mm
MODULE	Width 296mm	Depth 91mm	Length up to 3.6m

* Alternative spacing available - please see website